


The six simple steps to install this product require a drill, 5/16" (7.9 mm) drill bit, hammer, and wrench.


STEP 1

Place the flat surface of the Hager Latch Protection Plate 3/16" (4.8 mm) in from the edge of the door.

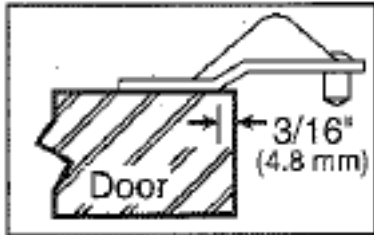


STEP 2

Center the plate vertically on the center of the lock, whether mortised or cylindrical.

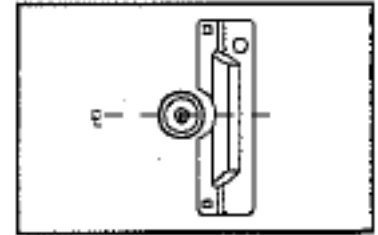


STEP 3

With the square hole held to the door, use this as a guide to drill two 5/16" (7.9 mm) diameter holes through the door.

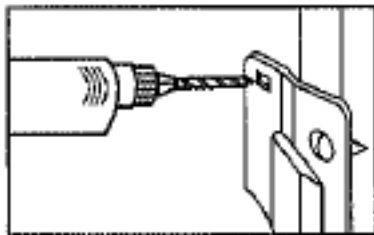


STEP 4

Insert two carriage bolts through the plate and secure with the 3/4" hex sleeve nuts on the inside.

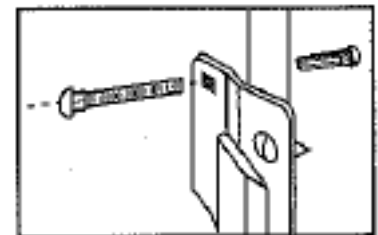

STEP 5

Close the door until the pin makes contact with the door jamb. Lightly strike head of pin with hammer to mark location of pin clearance hole.

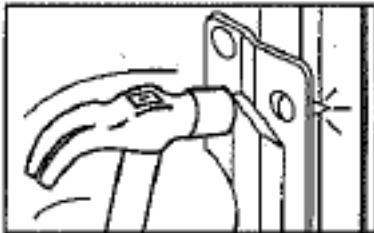

STEP 6

With the door in the open position, drill 5/16" (7.9 mm) hole into the jamb, marked in Step 5.

